



**Read directions carefully
before opening.**

Revised Installation from drain line flow control to drain saddle

A reducing union connection is now included that will be used to make the connection from the 300 cc 1/4" flow control to the 3/8" drain saddle.

When connecting the drain line flow to the drain bracket (#3 on the diagram below) you will use 1 foot of the **RED** 1/4" tubing and connect the reducing union.

On the 3/8" of the union you will connect the 3/8" **BLACK** tubing then run to the drain saddle.




The reason for this change is for adding an optional air gap faucet .

The **BLUE** 3/8" supplied line needs to be cut and used to connect the faucet and the tank.

INSTALLATION DIAGRAM

- 1 Water supply
- 2 Processed water tap
- 3 Drain bracket
- 4 Storage tank tap
- 5 UV lamp power (optional)
- 6 Booster pump (optional)

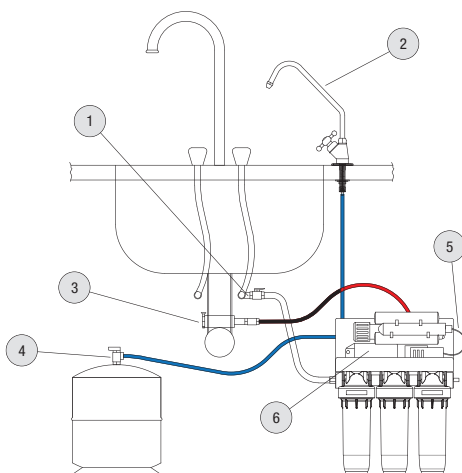

www.atlasfiltri.com

Atlas Filtri North America LLC
 1068 North Farms Road, Building 3, Wallingford, CT 06492, USA
 Office +1 (203) 284-0080 - Fax +1 (203) 294-9226 – email: atlasfiltrinorthamerica@atlasfiltri.com
 A Company of the Atlas Filtri Group. World headquarters and production facilities located in Italy.

AB9210274 - R03 04/24. Subject to change without notice.