

PP5FOS Series

Stainless Steel Housing Sediment and Scale Reduction Type

Designed for commercial water heater and tankless heating systems

Atlas Filtri® PP5FOS are stainless steel high flow filtration systems for the reduction of sediment and scale in commercial water heater and tankless heating system applications. Stainless 316 housings can incorporate Atlas Filtri melt blown 5-micron sediment filters with polypropylene. ScaleArmor™ media is a special grade of media to reduce scale build up on heater coils and heating tank systems.

The multi-cartridge housing is a complete line of five around models to accommodate a wide range of flow rates. Designed pressure of 150psi (10 bar) at 300°F (149°C). Standard inlet and outlet connection are 2" MPT. Standard finish is poly-coat over stainless. Standard gasket is FDA grade Buna-N.

Melt blown CPP smooth cartridges with heights from 10" to 40" are made to comply with the most stringent regulations for applications in drinking water. These five-micron polypropylene cartridges are suitable for many filtration applications due to its wide chemical-physical compatibility to a variety of water-based solutions.

The ScaleArmor™ media incorporated into the center core of the filter is design as a slow release, low acid media specifically for extreme water conditions found in high temperature filtration applications. The media is designed to last 12 months as it releases slowly into the water supply. When ordering this design, a smaller stem is also required to accommodate the filter with the media included.

Atlas Filtri is driven to providing our customer with the best available products to meet specific filtration requirements. This is done by using the most advanced manufacturing and design methods. The international patents received come from a constant commitment to research and develop that result in new and innovative products.

Check out more about Atlas Filtri at atlasfiltri.com.



PP5FOS
Stainless Steel Housings

Features	Specifications
<ul style="list-style-type: none"> Designed for commercial and industrial filtration applications Heavy-duty stainless-steel construction Pipe fittings readily and easily accessible Knife-edge seal at both cartridge ends for a positive and seal eliminating by-pass Standard double open-ended cartridges with scale reduction media included Flange connections optional 5-micron polypropylene melt-blown filters ScaleArmor™ media for slow, even release of media 	<p>Materials: <i>Housing Construction:</i> 316L Stainless <i>Seal:</i> FDA Grade Buna-N rubber <i>Filter Construction:</i> Polypropylene <i>Filter Media:</i> ScaleArmor™ media</p> <p>Working Conditions: <i>Working Temperature Range:</i> Min 39.2°F (4°C) – Max 177°F (80.6°C)</p> <p>Media Temperature Range: Max 220°F (104°C) in heated environment</p>



10", 20", 30" and 40"
Sediment Filter with ScaleArmor™ Media
Filters and Stems Ordered Separately

Certifications



Scale Armor TM media is certified by IAPMO R&T against IAPMO Z601 for material safety requirement.





CPP filter cartridges are certified by IAPMO R&T to NSF/ANSI 42, 61, 372 and CSA B483.1 for Material Safety and lead free requirement.

PRODUCT SPECIFICATION AND PERFORMANCE

Listed PP5FOS housing models with optional sediment and scale reduction cartridges and stems

Model	Quantity (Length) of Cartridge (1)	Flow Rate GPM (2)	Pipe Size	Drains	Max Cartridge Diameter	Shipping Weight Clamp	Box Size Clamp	Clamp Style Dim A
PP5FOS1	5 Cart 10"	35	2" NPT	1/2" NPT	2 3/4" DD	25 lb	12x12x23	20 7/8"
RA5775508	Melt-blown with ScaleArmor™ - 2.5"x10" - SX - Smooth - Double Open-ended - 5 Micron (QTY 5 required)							
PP5FOS2	5 Cart 20"	70	2" NPT	1/2" NPT	2 3/4" DD	31 lb	12x12x33	30 7/8"
RA5777526	Melt-blown with ScaleArmor™ - 2.5"x20" - SX - Smooth - Double Open-ended - 5 Micron (QTY 5 Required)							
PP5FOS3	5 Cart 30"	105	2" NPT	1/2" NPT	2 3/4" DD	38 lb	12x12x43	40 7/8"
RA5778508	Melt-blown with ScaleArmor™ - 2.5"x30" - SX - Smooth - Double Open-ended - 5 Micron (QTY 5 Required)							
PP5FOS4	5 Cart 40"	140	2" NPT	1/2" NPT	2 3/4" DD	45 lb	12x12x53	50 7/8"
RA5779508	Melt-blown with ScaleArmor™ - 2.5"x40" - SX - Smooth - Double Open-ended - 5 Micron (QTY 5 Required)							

Do not use with water that is microbiologically unsafe or on unknown quality without adequate disinfection before or after the system. Consult owner's manual for proper installation and necessary grounding requirements.

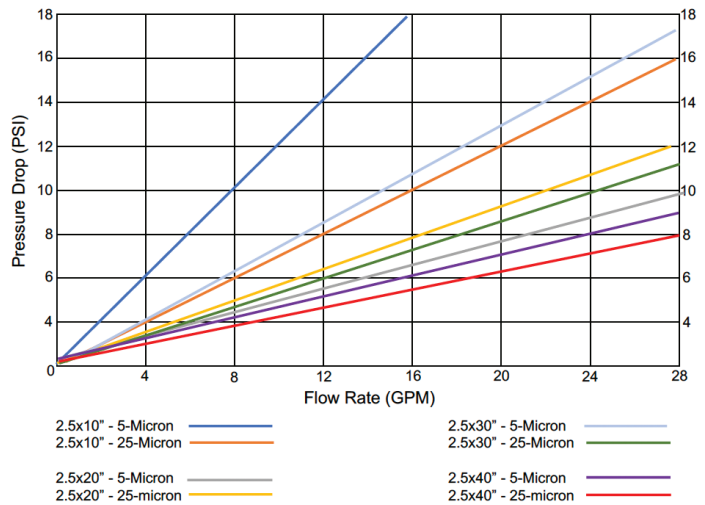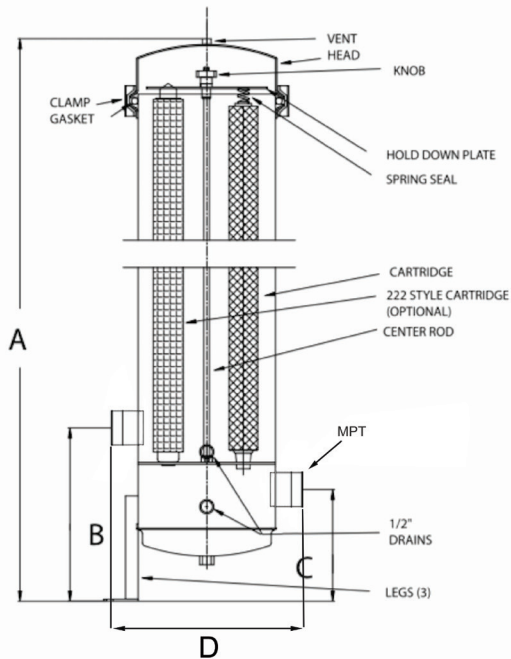

DIMENSIONS OF CLAMP STYLE UNIT

Model Number	Height A	Inlet Center B	Outlet Center C	End to End Distance D
PP5FOS1	20 7/8"	7"	3"	10 1/4"
PP5FOS2	30 7/8"	7"	3"	10 1/4"
PP5FOS3	40 7/8"	7"	3"	10 1/4"
PP5FOS4	50 7/8"	7"	3"	10 1/4"



Scan For Technical Data Sheet
Light Commercial Filtration Systems

Check out all of Atlas Filtri's various solutions and kits to meet the application requirement for your filtration needs at atlasfiltri.com

Atlas Filtri® is a registered trade mark of ATLAS FILTRI srl. Unauthorized use of the registered trade mark is prohibited. Images and context are the property of ATLAS FILTRI srl, which reserves the right to change product design and specification without prior notification.



Atlas Filtri North America LLC
1068 North Farms Road, Building 3, Wallingford, CT 06492, USA
Office +1 (203) 284-0080 | email: atlasfiltrinorthamerica@atlasfiltri.com
A company of the Atlas Filtri Group. World headquarters located in Italy. Production facilities located in Italy and USA.