



water filtration



find out more: us.atlasfiltri.com



TANKLESS WATER HEATER FILTRATION SYSTEM

Single cartridge, two-stage filtration solution. Connects before the tankless water heater and meets the OEM warranty spec. Provides 12-month life at 15 grain hard water by reducing scale in the tankless water heater and downstream household appliances. Also reduces corrosion caused by chlorides.

Maximum Working Pressure: 125 psi
Maximum Working Temperature: 113°F
Maximum Flow Rate: 14 GPM

BLUE PN# ZC1381427 **CLEAR** PN# ZC1381443

CARTRIDGE: PN# RA5777526
CPP SP 20 SX

TWO-STAGE
SEDIMENT/SCALE FILTER
5 Micron



CARTRIDGE INCLUDED

UNDER COUNTER FILTRATION SYSTEM

Sediment and chlorine taste & odor reduction without flow restriction, providing bottle-quality water. Approximate one-year filter changeout at 2.5 gpm for 8,000 gallons, or every 12 months. Connects also to under counter hot water, ice machines, and refrigerator water lines.



Maximum Working Pressure: 125 psi
Maximum Working Temperature: 113°F
Maximum Flow Rate CTO: 2 GPM
Maximum Flow Rate LEAD: 0.75 GPM

WITH CTO CARTRIDGE PN# ZC111T618 **WITH PB CARTRIDGE** PN# ZC111T608

CARTRIDGE: PN# RE2510CT5
CB AF CTO
CARBON BLOCK

CHLORINE TASTE AND ODOR
5 Micron



CARTRIDGE INCLUDED

CARTRIDGE: PN# RE2510P05
CB AF PB
CARBON BLOCK

HEAVY METALS
0.5 Micron



CARTRIDGE INCLUDED



OASIS DP SANIC STD UNDER COUNTER RO

Under-counter reverse osmosis unit comes ready to install. This exclusive SANIC water purifier features a re-mineralizer cartridge to ensure the best tasting water, including beneficial electrolytes typically removed by other RO systems. Also available in standard material.

Maximum Working Pressure: 116 psi
Maximum Working Temperature: 113°F
Maximum TDS: 1000 ppm

PN# SE6075310

SELF-CLEANING SEDIMENT FILTRATION SYSTEM

Includes a 90 micron stainless steel screen cartridge for large sediment. Unit flushes from the inside of the cartridge out when the ball valve is opened at the bottom of the housing. Perfect for irrigation applications.

Maximum Working Pressure: 125 psi
Minimum Working Pressure: 26 psi
Maximum Working Temperature: 113°F
Maximum Working Temperature (HOT model): 176°F
Maximum Flow Rate: 40 GPM

HOT PN# RA6000005 **CLEAR** PN# RA6000040

CARTRIDGE:
STAINLESS STEEL

HEAVY SEDIMENT FILTER
50 or 90 Micron



CARTRIDGE INCLUDED



A range of housings is certified by IAPMO R&T to NSF/ANSI 42 - Material Safety and Structural Integrity only, 61, 372 - lead free, CSA B483.1.



Sediments



Scale



Taste & Odor



Chlorine

10" WHOLE HOUSE FILTRATION SYSTEM



Connects at the entry point of the house. Available with a single, two-stage filtration system cartridge (including sediment and scale reduction media) as an alternative to a water softener. Also available with a carbon block for chlorine taste & odor and sediment reduction, providing bottle-quality water.

Maximum Working Pressure: 120 psi
Maximum Working Temperature: 113°F
Maximum Flow Rate: 40 GPM

CLEAR

PN# ZA1700745

CARTRIDGE:

CB AF CTO
 CARBON BLOCK

CHLORINE TASTE AND ODOR
5 Micron

PN# RE4510CT5



OR

CARTRIDGE:

CPP 10 BIG SX

TWO-STAGE
 SEDIMENT/SCALE FILTER
5 Micron

PN# RA5775608



XL WHOLE HOUSE or COMMERCIAL FILTRATION SYSTEM

Designed for higher flows and longer changeouts, this three-stage filtration system features sediment, scale, and chlorine taste & odor reduction. It is an effective alternative to a water softener, and also reduces corrosion caused by chlorides.

Maximum Working Pressure: 120 psi
Maximum Working Temperature: 113°F
Maximum Flow Rate: 40 GPM

BLUE

PN# ZC1802746

CARTRIDGE:

CPP 20 SP BIG SX

TWO-STAGE
 SEDIMENT/SCALE FILTER
5 Micron

PN# RA5777608



CARTRIDGE INCLUDED

CARTRIDGE:

CB AF CTO
 CARBON BLOCK

CHLORINE TASTE AND ODOR
5 Micron

PN# RE4520CT5



COMMERCIAL FILTRATION SYSTEM

Available with optional sediment and scale reduction cartridges or 5 micron rated carbon block cartridges. The media will reduce scale build up throughout the location and the carbon block cartridge will improve the taste and odor of the water.

Maximum Working Pressure: 150 psi
Maximum Working Temperature: 300°F
Maximum Boiler Recirculation Temperature: 220°F
Flow Rate: 28 to 616 GPM

FITTING CONNECTIONS:

2"

3"

4"

CARTRIDGE LENGTHS:

10"

20"

30"

40"

CARTRIDGE O.D.:

2.5"

CARTRIDGE:

CPP 40 SX

TWO-STAGE
 SEDIMENT/SCALE FILTER
5 Micron

PN# RA5779508




Unit size by flow rate for specific applications



DP FILTER HOUSINGS

Available in a patented manifold design with single, double, or triple housings. Options include gauges, drain kits, and stainless steel inserts.

Maximum Working Pressure: 125 psi
Maximum Working Temperature: 113°F



A range of housings is certified by IAPMO R&T to NSF/ANSI 42 - Material Safety and Structural Integrity only, 61, 372 - lead free, CSA B483.1.

FITTING CONNECTIONS:



CARTRIDGE LENGTHS: CARTRIDGE O.D.:




CARTRIDGE CONFIGURATION:


Housings work with Standard Double O-ring Seal (222 end-cap). Drain kit units require 222 cartridges.



OPTIONAL GAUGES AND DRAIN KIT



OPTIONAL STAINLESS STEEL INSERT



DP BIG FILTER HOUSINGS

Same as DP units, but in a 4.5" outer diameter design. Available in a patented manifold design with single, double, or triple housings. Options include gauges, drain kits, or lead-free brass inserts.

Maximum Working Pressure: 120 psi
Maximum Working Temperature: 113°F




A range of housings is certified by IAPMO R&T to NSF/ANSI 42 - Material Safety and Structural Integrity only, 61, 372 - lead free, CSA B483.1.

FITTING CONNECTIONS:




CARTRIDGE LENGTHS: CARTRIDGE O.D.:



OPTIONAL LEG KITS FOR 10" AND 20"



OPTIONAL LEAD-FREE BRASS INSERT





PLUS 3P FILTER HOUSINGS

Housings with a special touch: the ring nut compresses the sump o-ring to the head with no stripping. Available as both Single and Duplex housings for cartridges with standard SX flat seals (DOE).

Maximum Working Pressure: 125 psi
Maximum Working Temperature: 113°F

FITTING CONNECTIONS:

- 3/4"
- 1"

CARTRIDGE LENGTHS:

- 10"
- 20"


CARTRIDGE O.D.:

- 2.5"



A range of housings is certified by IAPMO R&T to NSF/ANSI 42 - Material Safety and Structural Integrity only, 61, 372 - lead free, CSA B483.1.

OPTIONAL STAINLESS STEEL INSERT



OPTIONAL GAUGES



PLUS 3P HOT FILTER HOUSINGS

Same as standard 3P housings, but designed for higher Maximum Working Temperatures.

Maximum Working Pressure: 125 psi
Maximum Working Temperature: 176°F

FITTING CONNECTIONS:

- 3/4"
- 1"

CARTRIDGE LENGTHS:

- 10"
- 20"

CARTRIDGE O.D.:

- 2.5"



Housings tested and certified by IAPMO R&T to NSF/ANSI 42 - Structural Integrity Only and CSA B483.1 - Structural Integrity Only.

OPTIONAL DRAIN KIT



HYDRA RAINMASTER MULTI-STAGE SELF-CLEANING FILTERS

Range of self-cleaning filters, specially designed for the filtration and treatment of recycled rainwater.

Maximum Working Pressure: 125 psi
Minimum Working Pressure: 26 psi
Maximum Working Temperature: 113°F

FITTING CONNECTIONS:

- 3/4"
- 1"



PLUS 3P SANIC FILTER HOUSINGS


Complete line of antimicrobial filter housings.

Maximum Working Pressure: 125 psi
Maximum Working Temperature: 113°F



Systems certified by IAPMO R&T against NSF/ANSI 42 for bacteriostasis and NSF/ANSI 61 for material safety requirements.

FITTING CONNECTIONS: CARTRIDGE LENGTHS: CARTRIDGE O.D.:



DP SANIC FILTER HOUSINGS

Complete line of antimicrobial filter housings.

Maximum Working Pressure: 125 psi
Maximum Working Temperature: 113°F



Systems certified by IAPMO R&T against NSF/ANSI 42 for bacteriostasis and NSF/ANSI 61 for material safety requirements.

FITTING CONNECTIONS:



CARTRIDGE LENGTHS: CARTRIDGE O.D.:



CARTRIDGE CONFIGURATION:

Housings work with Standard Double O-ring Seal (222 end-cap). Drain kit units require 222 cartridges.



DP BIG SANIC FILTER HOUSINGS

Complete line of antimicrobial filter housings.

Maximum Working Pressure: 120 psi
Maximum Working Temperature: 113°F



Systems certified by IAPMO R&T against NSF/ANSI 42 for bacteriostasis and NSF/ANSI 61 for material safety requirements.

FITTING CONNECTIONS:




CARTRIDGE LENGTHS: CARTRIDGE O.D.:






water filtration

FILTER CARTRIDGES

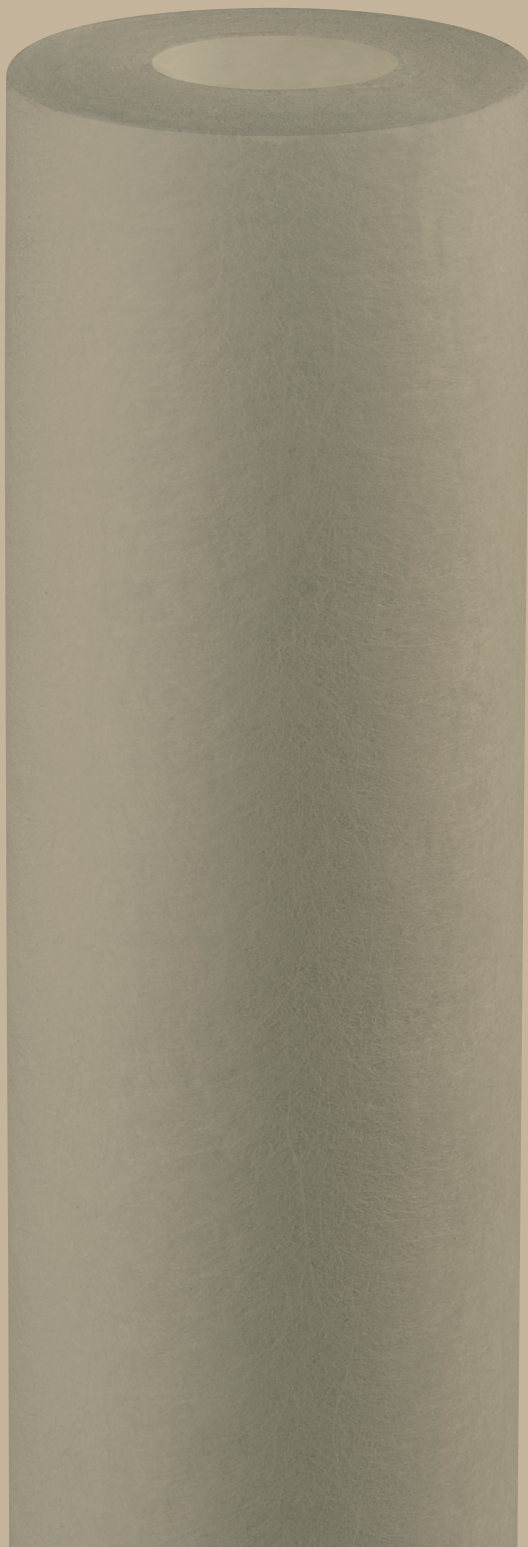

find out more: us.atlafiltri.com

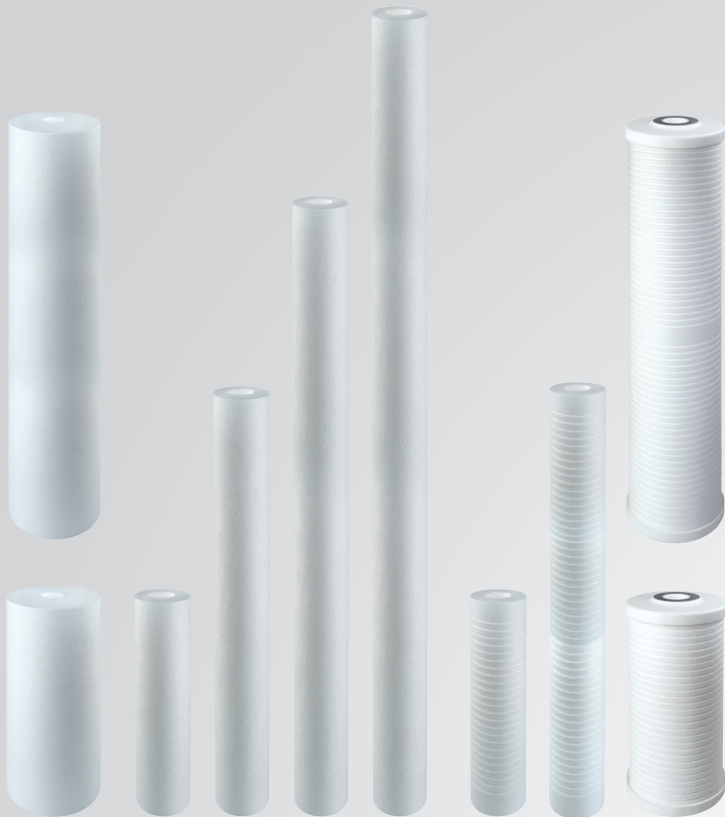

NON GROOVED

GROOVED

MELT BLOWN SEDIMENT FILTERS

High-efficiency, polypropylene cartridges available with grooves.

Maximum Working Temperature: 176°F
Minimum Working Temperature: 39.2°F

CARTRIDGE LENGTHS WITH 2.5" O.D.:

- 10"
- 20"
- 30"
- 40"

CARTRIDGE LENGTHS WITH 4.5" O.D.:

- 10"
- 20"

MICRON RATINGS:

- 1 mcr
- 5 mcr
- 10 mcr
- 25 mcr
- 50 mcr

GRADIENT DENSITY:

- 25 mcr
- 1 mcr
- /
- 25 mcr
- 5 mcr
- /
- 50 mcr
- 1 mcr

STRING WOUND SEDIMENT FILTERS

Polypropylene string wound cartridges, excellent for heavy and coarse sediment filtration.

Maximum Working Temperature: 113°F
Maximum Working Temperature (**HOT MODEL**): 176°F
Minimum Working Temperature: 39.2°F

CARTRIDGE LENGTHS WITH 2.5" O.D.:

- 10"
- 20"
- 30"
- 40"

CARTRIDGE LENGTHS WITH 4.5" O.D.:


- 10"
- 20"

MICRON RATINGS:

- 1 mcr
- 5 mcr
- 10 mcr
- 25 mcr
- 50 mcr
- 100 mcr

GRADIENT DENSITY:

- 10 mcr
- 1 mcr
- /
- 25 mcr
- 1 mcr
- /
- 50 mcr
- 5 mcr
- 50 mcr
- 10 mcr
- /
- 100 mcr
- 25 mcr
- /
- 100 mcr
- 50 mcr

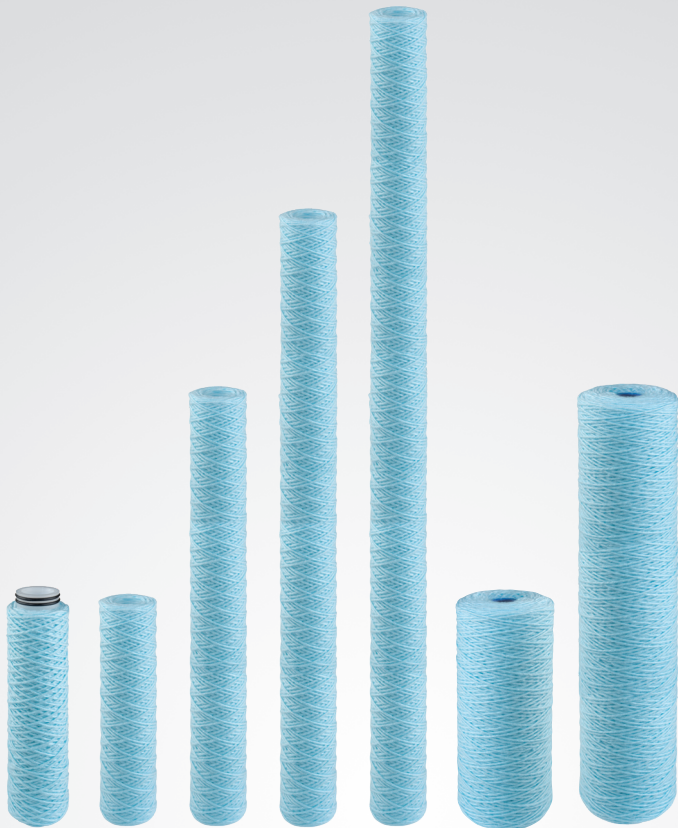

FA SANIC SEDIMENT FILTERS

Polypropylene string wound cartridges, with patented antimicrobial product protection technology.

Maximum Working Temperature: 176°F
Minimum Working Temperature: 39.2°F

CARTRIDGE LENGTHS WITH 2.5" O.D.:


- 10"
- 20"
- 30"
- 40"

CARTRIDGE LENGTHS WITH 4.5" O.D.:

- 10"
- 20"

MICRON RATINGS:

- 1 mcr
- 5 mcr
- 10 mcr
- 25 mcr
- 50 mcr
- 100 mcr

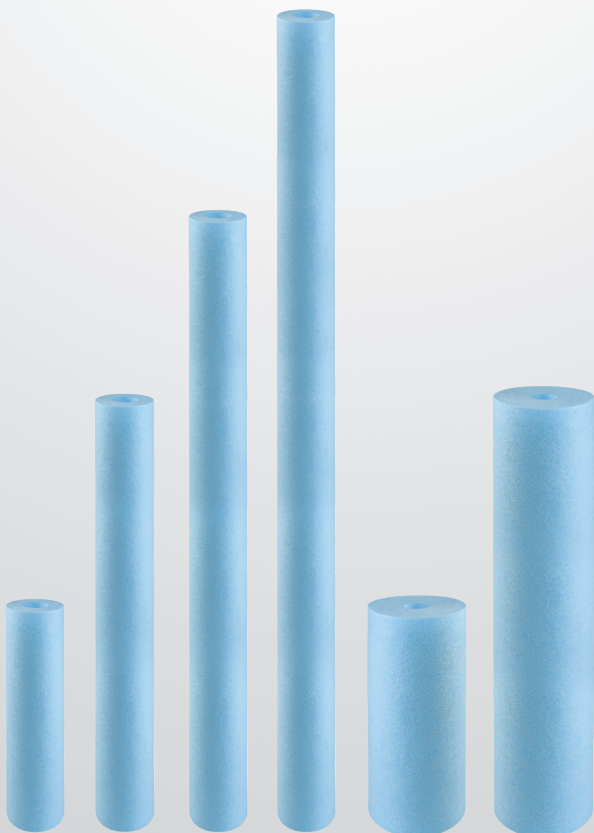

CPP SANIC SEDIMENT FILTERS

Polypropylene cartridges with antimicrobial product protection technology.

Maximum Working Temperature: 113°F
Minimum Working Temperature: 39.2°F

CARTRIDGE LENGTHS WITH 2.5" O.D.:

- 10"
- 20"
- 30"
- 40"

CARTRIDGE LENGTHS WITH 4.5" O.D.:

- 10"
- 20"

MICRON RATINGS:

- 1 mcr
- 5 mcr
- 10 mcr
- 25 mcr
- 50 mcr



VOC

CTO



LEAD/VOC

CHLORAMINE

CARBON BLOCK FILTERS

Available in VOC CYST, VOC CYST/LEAD and chloramine, for high flow and low pressure drop. Excellent for fine sediment filtration, various contaminants, and taste removal.

Maximum Working Temperature: 125°F

Minimum Working Temperature: 39.2°F

CARTRIDGE LENGTHS WITH 2.5" O.D.:

10"

20"

CARTRIDGE LENGTHS WITH 4.5" O.D.:

10"

20"

MICRON RATINGS:

0.5
mcr

5
mcr



MELT BLOWN TWO-STAGE SEDIMENT & SCALE REDUCTION WATER CONDITIONING FILTERS

Two-stage filtration high-efficiency sediment cartridges filled with long lasting FDA approved scale reduction media.

Maximum Working Temperature: 176°F

Minimum Working Temperature: 39°F

CARTRIDGE LENGTHS WITH 2.5" O.D.:

10"

20"

30"

40"

CARTRIDGE LENGTHS WITH 4.5" O.D.:

10"

20"

MICRON RATINGS:

1
mcr

5
mcr

10
mcr

25
mcr

50
mcr



LA GRANULAR ACTIVATED CARBON (GAC)

Clear canisters filled with GAC, made from coconut shell, for the reduction of chlorine, taste, odor (CTO) and volatile organic compounds (VOC). Designed to provide the highest contact time of the water through the whole GAC bed, LA cartridges are available in both 10" and 20".

Maximum Working Temperature: 113°F

Minimum Working Temperature: 39.2°F

CARTRIDGE LENGTHS WITH 2.5" O.D.:

10"

20"



FA CA WOUND POLYPROPYLENE THREAD AND GRANULAR ACTIVATED CARBON (GAC)

Wound polypropylene filter cartridge filled with GAC, made from coconut shell for the reduction of chlorine, taste, odor (CTO) and volatile organic compounds (VOC) providing pre-filtration at 5, 10, and 25. CA cartridges are available with height 10".

Maximum Working Temperature: 113°F

Minimum Working Temperature: 39.2°F

CARTRIDGE LENGTHS WITH 2.5" O.D.:

10"



P

PS

P & PS FILLABLE CANISTERS

Plastic container that can be filled with Atlas Filtri media: granular activated carbon (GAC), polyphosphate crystals, and ionic exchange resins. For the use of other media, be sure to contact Atlas Filtri for approval. Available in either 10" and 20".

CARTRIDGE LENGTHS WITH 2.5" O.D.:

10"

20"



P BIG FILLABLE CANISTERS

Plastic container that can be filled with Atlas Filtri media: granular activated carbon (GAC), polyphosphate crystals, and ionic exchange resins. For the use of other media, be sure to contact Atlas Filtri for approval. Available in either 10" and 20".

CARTRIDGE LENGTHS WITH 4.5" O.D.:

10"

20"

FLOOR DISPLAY

THE PERFECT TOOL TO INCREASE YOUR BUSINESS




SPECIFICATIONS

1. Material:

Cardboard + Opaque lamination

2. Accessories included:

- 4 Adjustable shelves
- 1 Brochure holder pocket
- Double-sided walls

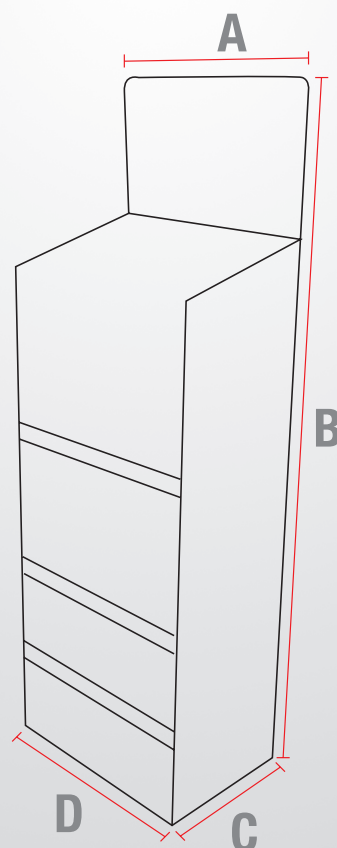

DIMENSIONS

A= 24 in
B= 70 in
C= 18 in
D= 24 in