

# **DP Scale Reduction Tankless Water Heater Unit Point-of-Use, Sediment and Scale Reduction, Stainless Inserts**

Designed for water heaters and tankless heating systems

Atlas Filtri® DP Reduction Scale Unit is a point-of-use water filtration system for the reduction of sediment and lime scale build up on the inside of water heaters and tankless heating systems.

The polypropylene housing accepts a 5-micron 20" sediment filter including a special grade of polyphosphate media to reduce scale build up on heater coils and heating tank systems.

The wall mount filtration unit is designed to be installed prior to a water heating unit to accommodate flow rates of up to 14 gallons per minute. Design pressure of 125psi (8.6 bar) @ 113°F (45°C) maximum temperature. Standard inlet and outlet connection are 3/4" NPT. Standard head unit is reinforced polypropylene and sump is PET. Standard O-ring is EPDM. Filter Cartridge replacements are estimated at 1 year on 15 grain hard water.

Melt blown CPP smooth cartridges with a length from 20" are made to comply with the most stringent regulations for applications in drinking water. These five micron polypropylene cartridges are suitable for many filtration applications due to its wide chemical-physical compatibility to a variety of water-based solutions.

The polyphosphate incorporated into the center core of the filter is design as a slow release, low acid media specifically for extreme water conditions found in high temperature filtration applications. The media is designed to last one year as it releases slowly into the water supply.

Atlas Filtri is driven to providing our customer with the best available products to meet specific filtration requirements. This is done by using the most advanced manufacturing and design methods. The international patents received come from a constant commitment to research and develop that result in new and innovative products.





#### **Features**

- Designed for residential filtration applications
- Accommodates single standard 2.5" OD Filter Cartridges
- 3/4" NPT inlet and outlet fitting connections
- Includes pressure-relief feature that includes an O-ring seal. No spring is used that can result in water leaks
- Knife-edge seal at both ends for a positive and seal eliminating by-pass
- Standard double open-ended cartridges with scale reduction media included
- 5-micron polypropylene melt blown filters
- Polyphosphate glassy bead for slow and low even release of media

### **Specifications**

#### Materials

Head Connection: Reinforced Polypropylene Housing

Construction: PET Seal: FDA Grade EPDM

Filter Construction: Polypropylene Filter Media: Glassy Polyphosphate

#### **Norking Conditions:**

Working Temperature Range: Min 39.2°F (4°C) – Max 113°F (45°C)

Media Temperature Range of Dissolved Polyphosphate:

Max 220°F (104°C) in heated environment

#### Included

DP Plastic Housing
Plastic Bracket
Filter Wrench
O-Ring and Lubricant
and 5 Micron
Sediment/Scale Reduction Filter
Cartridge
Stainless Steel FNPT Threads







#### PRODUCT SPECIFICATION and PERFORMANCE

Description

Kit Model

Listed DP housing models with sediment and scale reduction cartridges

ZC1381462	Dimensions								Weight
	DP 20 RT Mono ¾ NPT IN AB Complete+CPP20 RT SX 5 micron Stainless Steel Inserts	2.5"x 20"	3/4" NPT	22.72"x 4.80" (577x 122mm)	6	24.6"	17.9"	14.6"	24.19lb
Replacement Filter	Description	Size	Туре	Maximum Flow Rate	Box QTY	E	3ox Size		Box Weight
RA5777526	CPP-SP 20 SX 5 mcr Sediment/Scale reduction	2.5"x 20"	Melt Blown	14 GPM	25	13"	13"	21"	28.85lb

**Fitting** 


Housing

**Box QTY** 

**Box Size** 


Box

Size

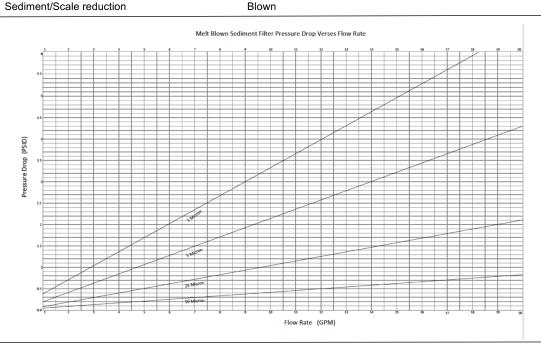

## Removal Efficiency in %

Removal Efficiency In (%) Percentage

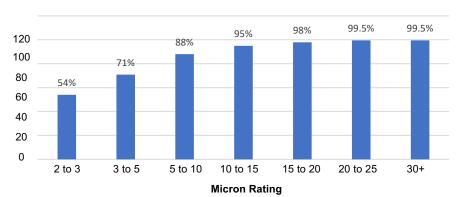

Atlas Filtri® is a registered trade mark of ATLAS FILTRI srl. Unauthorized use of the registered trade mark is prohibited. Images and context are the property of ATLAS FILTRI srl, which reserves the right to change product design and specification without prior notification.



#### Atlas Filtri North America LLC

1068 North Farms Road, Building 3, Wallingford, CT 06492, USA Office +1 (203) 284-0080 - Fax +1 (203) 294-9226 - email: <a href="mailto:atlasfiltrinorthamerica@atlasfiltri.com">atlasfiltrinorthamerica@atlasfiltri.com</a> A Company of the Atlas Filtri Group. World headquarters and production facilities located in Italy.