


Sediment filtration.
Average life-span: 3-6 months.
Maintenance: none.

WORKING CONDITIONS

Max working temperature _____ 113°F (45°C)
 Min working temperature _____ 39.2°F (4°C)

SPECIFICATIONS

Non-toxic materials, suitable for drinking water.
 Filter media: polypropylene thread.
 Inner core: polypropylene.
 O-rings: EPDM.

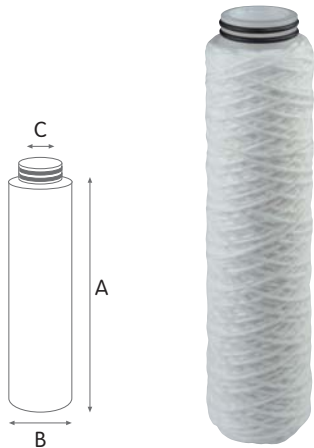

FA BX

WOUND POLYPROPYLENE THREAD CARTRIDGES WITH DOUBLE O-RING COLLAR 45 MM

PART NUMBER	MODEL DESCRIPTION	NOMINAL HEIGHT	NOMINAL FILTRATION MICRON	RECOMMENDED FLOW RATE (gpm)	DIMENSIONS (inches)		
					A	B	C
OD 2.40" x ID 1.10"							
RA5115206	FA 10 BX 1 mcr	10"	1	8.8	9.84	2.40	1.18
RA5115208	FA 10 BX 5 mcr	10"	5	8.8	9.84	2.40	1.18
RA5115209	FA 10 BX 10 mcr	10"	10	8.8	9.84	2.40	1.18
RA5115211	FA 10 BX 25 mcr	10"	25	8.8	9.84	2.40	1.18
RA5115214	FA 10 BX 50 mcr	10"	50	8.8	9.84	2.40	1.18
RA5115219	FA 10 BX 100 mcr	10"	100	8.8	9.84	2.40	1.18
RA5117206	FA 20 BX 1 mcr	20"	1	13.2	19.88	2.40	0.99
RA5117208	FA 20 BX 5 mcr	20"	5	13.2	19.88	2.40	0.99
RA5117209	FA 20 BX 10 mcr	20"	10	13.2	19.88	2.40	0.99
RA5117211	FA 20 BX 25 mcr	20"	25	13.2	19.88	2.40	0.99
RA5117214	FA 20 BX 50 mcr	20"	50	13.2	19.88	2.40	0.99
RA5117219	FA 20 BX 100 mcr	20"	100	13.2	19.88	2.40	0.99

PRODUCTS AVAILABLE ON MINIMUM QUANTITY:

- 5" and 7" filter cartridges are available on-demand with minimum order quantity



www.atlasfiltri.com