



Sediment filtration.
Average life-span: 6 months.
Maintenance: none.

WORKING CONDITIONS


Max working temperature _____ 113°F (45°C)
 Min working temperature _____ 39.2°F (4°C)

SPECIFICATIONS

Non-toxic materials, suitable for drinking water.
 Filter media: polypropylene thread with antimicrobial product protection technology.
 Inner core: polypropylene.
 O-rings: EPDM.

FA SANIC BX

WOUND POLYPROPYLENE THREAD CARTRIDGE WITH DOUBLE O-RING COLLAR 45 MM

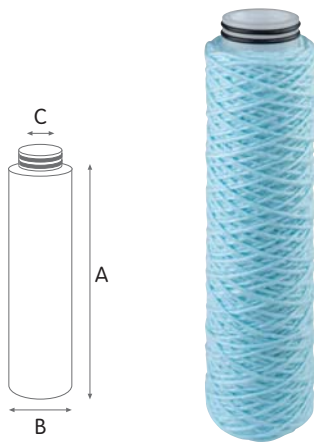

PART NUMBER	MODEL DESCRIPTION	NOMINAL HEIGHT	NOMINAL FILTRATION MICRON	RECOMMENDED FLOW RATE (gpm)	DIMENSIONS (inches)		
					A	B	C
OD 2.40" x ID 1.10"							
SA5115206	FA 10 SANIC BX 1 mcr	10"	1	8.8	9.84	2.40	1.18
SA5115208	FA 10 SANIC BX 5 mcr	10"	5	8.8	9.84	2.40	1.18
SA5115209	FA 10 SANIC BX 10 mcr	10"	10	8.8	9.84	2.40	1.18
SA5115211	FA 10 SANIC BX 25 mcr	10"	25	8.8	9.84	2.40	1.18
SA5115214	FA 10 SANIC BX 50 mcr	10"	50	8.8	9.84	2.40	1.18
SA5115219	FA 10 SANIC BX 100 mcr	10"	100	8.8	9.84	2.40	1.18
SA5117206	FA 20 SANIC BX 1 mcr	20"	1	13.2	19.88	2.40	0.99
SA5117208	FA 20 SANIC BX 5 mcr	20"	5	13.2	19.88	2.40	0.99
SA5117209	FA 20 SANIC BX 10 mcr	20"	10	13.2	19.88	2.40	0.99
SA5117211	FA 20 SANIC BX 25 mcr	20"	25	13.2	19.88	2.40	0.99
SA5117214	FA 20 SANIC BX 50 mcr	20"	50	13.2	19.88	2.40	0.99
SA5117219	FA 20 SANIC BX 100 mcr	20"	100	13.2	19.88	2.40	0.99



www.atlasfiltri.com