



# RA A stainless steel washable net AISI 316

**Sediment filtration.**  
**Average life-span:** from 3 to 5 years.  
**Maintenance:** wash every month at least.


## WORKING CONDITIONS

Max working temperature \_\_\_\_\_ 176°F (80°C)  
 Min working temperature \_\_\_\_\_ 39.2°F (4°C)

## SPECIFICATIONS

Non-toxic materials, suitable for drinking water.  
 Filter media and inner armoring: stainless steel net AISI 316.  
 Inner core and end caps: polypropylene.  
 Gaskets SX: SEBS with antimicrobial product protection technology.  
 O-rings BX: EPDM.


Cartridges with stainless steel net and stainless steel inner armoring, with consistent water flow and very low pressure drop, standard filtration at 70 micron. Easy-to-wash filter net, long term durability of the materials and high collapse resistance make this cartridge range the most suitable for well water filtration. Height 10" and 20".

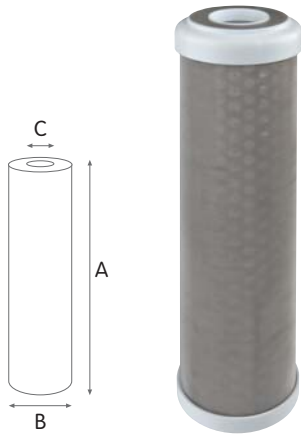

## RA A SX

STAINLESS STEEL AISI 316 WASHABLE NET WITH DOUBLE OPEN END (DOE)

PART NUMBER	MODEL DESCRIPTION	NOMINAL HEIGHT	NOMINAL FILTRATION MICRON	RECOMMENDED FLOW RATE (gpm)	DIMENSIONS (inches)		
					A	B	C
<b>OD 2.40" x ID 1.10"</b>							
RA5065116	RA 10 A SX 70 mcr	10"	70	11.0	9.84	2.76	1.18
RA5067117	RA 20 RT A SX 70 mcr	20"	70	17.6	20.08	2.76	1.18

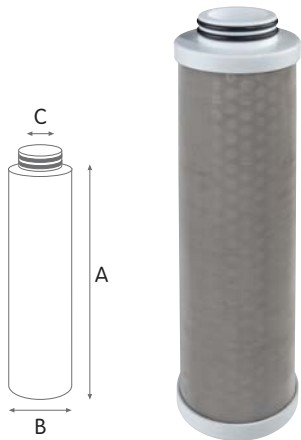

## RA A BX


STAINLESS STEEL AISI 316 WASHABLE NET WITH DOUBLE O-RING COLLAR 45 MM

PART NUMBER	MODEL DESCRIPTION	NOMINAL HEIGHT	NOMINAL FILTRATION MICRON	RECOMMENDED FLOW RATE (gpm)	DIMENSIONS (inches)		
					A	B	C
<b>OD 2.40" x ID 1.10"</b>							
RA5065216	RA 10 A BX 70 mcr	10"	70	11.0	9.84	2.76	1.18
RA5067216	RA 20 A BX 70 mcr	20"	70	17.6	19.88	2.76	1.18

### PRODUCTS AVAILABLE ON MINIMUM QUANTITY:

- 5" and 7" filter cartridges are available on-demand with minimum order quantity

FLOW RATE vs PRESSURE DROP  $\Delta p$   
 - Tests carried on 10" elements type RA 10 SX.  
 - Testing mode: 68°F - 43.5 psi (20°C - 3 bar)

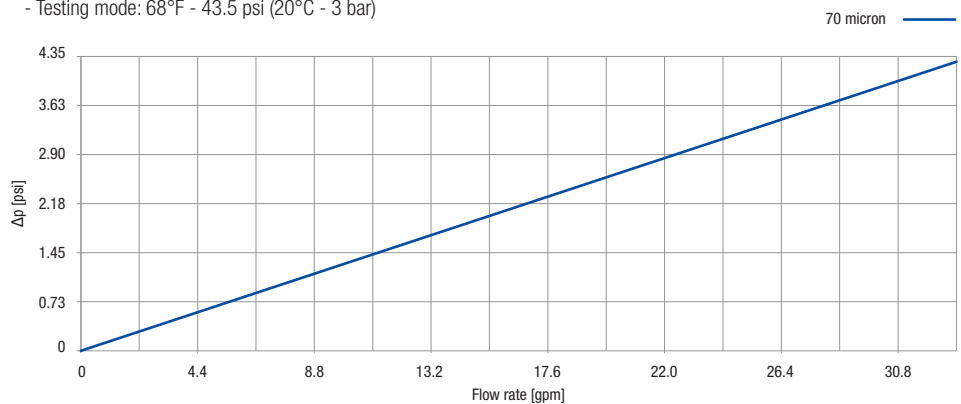

www.atlasfiltri.com