



SA BIG stainless steel washable net

Sediment filtration.
Average life-span: from 3 to 5 years.
Maintenance: wash every 3 months.


WORKING CONDITIONS

Max working temperature 80°C (176°F)
 Min working temperature 4°C (39.2°F)

SPECIFICATIONS

Non-toxic materials, suitable for drinking water.
 Filter media: stainless steel net AISI 316.
 Inner core and end caps: polypropylene.
 Gaskets SX: SEBS with antimicrobial product protection technology.

Range of cartridges with 4.50" outer diameter, made of pleated stainless steel net and polypropylene inner core, with large filtering surface, consistent water flow and very low pressure drop, standard filtration at 50 micron. Available in 2 versions: SA-A made with AISI 316 stainless steel, SA-C made with AISI 304 stainless steel. Height 10" and 20".

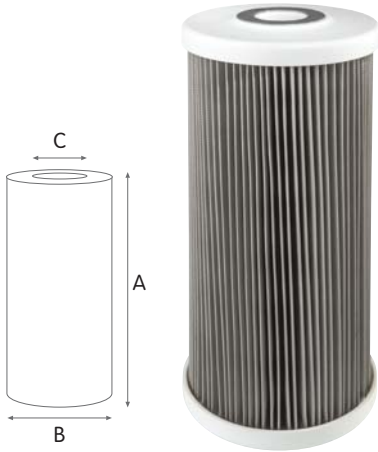

SA A BIG

PLEATED STAINLESS STEEL AISI 316 WASHABLE NET WITH DOUBLE OPEN END (DOE)


PART NUMBER	MODEL DESCRIPTION	NOMINAL HEIGHT	NOMINAL FILTRATION MICRON	RECOMMENDED FLOW RATE (gpm)	DIMENSIONS (inches)		
					A	B	C
OD 4.50" x ID 1.10"							
RA5055514	SA 10 A BIG SX 50 mcr	10"	50	17.6	9.84	4.65	1.07
RA5057514	SA 20 A BIG SX 50 mcr	20"	50	26.4	20.00	4.65	1.07

Surface Area:

10.55 ft² (0.98 m²) for 10" models; 22.71 ft² (2.11 m²) for 20" models

FLOW RATE vs PRESSURE DROP Δp

- Tests carried on 10" elements type SA 10 BIG.
- Testing mode: 68°F - 43.5 psi (20°C - 3 bar)

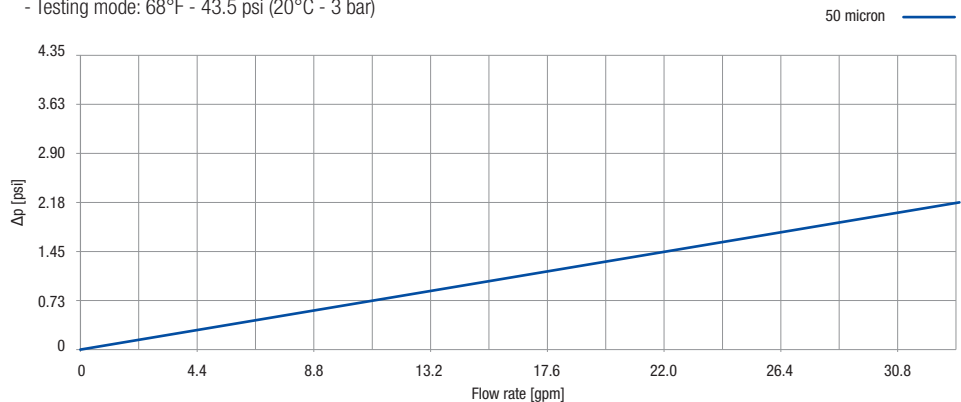

www.atlasfiltri.com